## Generation and Behavior of Airborne Particles (Aerosols)

Paul Baron Division of Applied Technology National Institute for Occupational Safety and Health Centers for Disease Control and Prevention





### Overview

- I. Particle size range
- II. Inhalation & lung deposition
- III. Particle behavior
  - Settling, impaction, electrostatic effects
- IV. Particle generation
  - Energy input, size, charge, humidity
    - Scenarios
    - Letter release
    - Carpet release
  - VI. Particle collection and measurement

### What is an AEROSOL?

- Simply defined- tiny particles or droplets suspended in air.
- The haze in the picture on the right is caused by light scattering from numerous water/oil droplets and mineral particles released into the air from the drilling of rock.




#### Are Aerosols dangerous?

- The air we breathe always contains solid particles or droplets and is therefore an aerosol.
- These aerosol particles can be from natural sources or man-made sources
- Sometimes the particles are of type that, at sufficient concentration, are toxic to our body.
- The organ in our body most sensitive to particle exposure is the respiratory system

### Toxic Aerosols!?

Our respiratory system is efficient at removing aerosols, but if they fall within particular size ranges, are highly concentrated, or toxic, they may cause adverse health effects. They may also deposit on skin or eyes, generally only causing irritation, though more toxic effects may occur. Very small particles may pass through the skin and enter the body that way. Soluble particles may dissolve and pass through the skin.

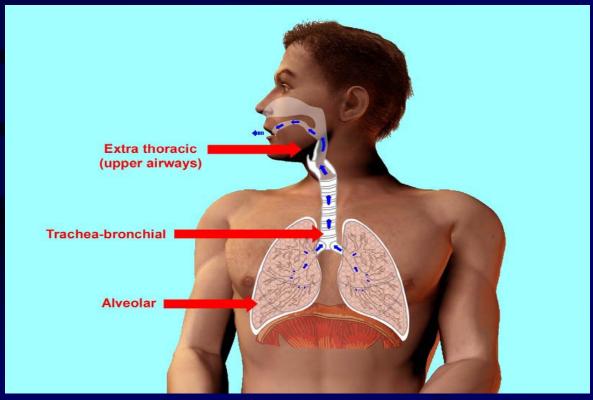

Read on for more details on aerosol generation and behavior

### Overall Scenario: Evaluation of Exposure in Workplaces

Aerosol Transport Based on Air Flow

Aerosol Sampling/ Measurement

> Filter Samplers

Direct

Direct Reading Instruments

AerosolSecondaryGeneration from,Sourcese.g., Grinding(Resuspension)

Loss Mechanisms Settling, Diffusion, Impaction, Electrostatic Deposition

Aerosol Losses to Surfaces

#### Aerosol Inhalation

#### Aerosol Assessment in the Workplace: Types of Measurements


- Sampling, usually with a filter and pump, provides a sample that can be analyzed in the lab for specific chemicals, quantity of dust, particle shape (fibers), etc.
- Direct reading instruments allow continuous observation of dust concentrations, e.g., mass or concentration or size distribution, but do not usually provide specifics of the aerosol type.


#### Aerosol Assessment in the Workplace: Types of Measurements

- The most accurate assessment of worker's exposure is measurement with a personal sampler, i.e, a collection or measurement device placed on the worker's chest.
- Techniques for control of exposures can use either personal samplers or (fixed) area measurement devices. Direct reading devices allow rapid assessment of the effectiveness of dust control devices or strategies.

# I. Aerosol Size Range


Particle size is often determined by the process that generated the particle. Combustion particles usually start out in the 0.01-0.05  $\mu$ m size range, but combine with each other (agglomerate) to form larger particles. Powder is broken down into smaller particles and released into the air; it is difficult to break down such particles smaller than ~0.5  $\mu$ m. Biological particles usually become airborne from liquid or powder forms, so these particles are usually larger than ~0.5  $\mu$ m.

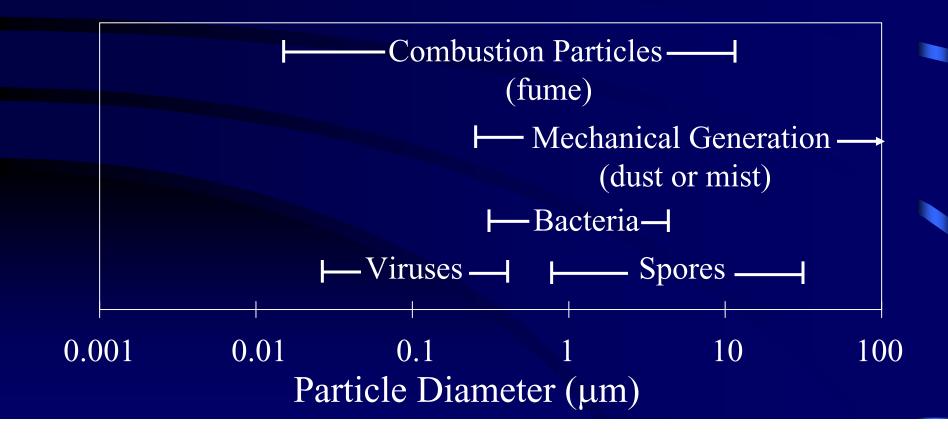

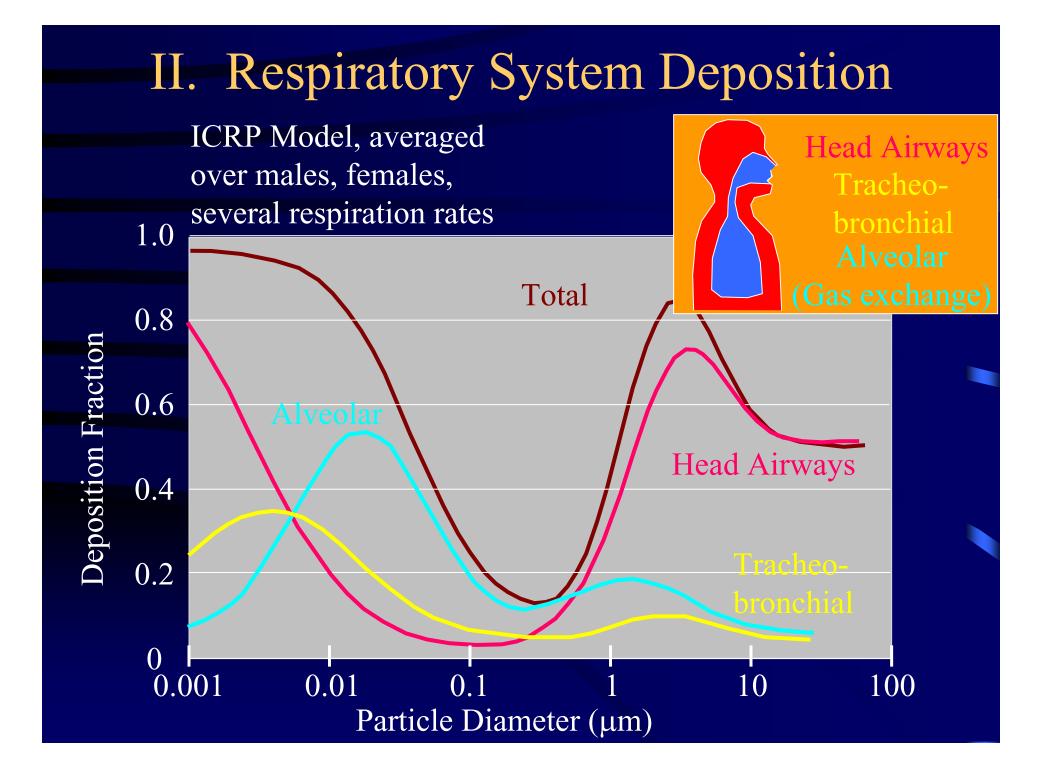

# III. Aerosol Particle Behavior


- Settling
- Impaction
- Charge effects
- Release from surfaces
- Agglomeration/ Deagglomeration

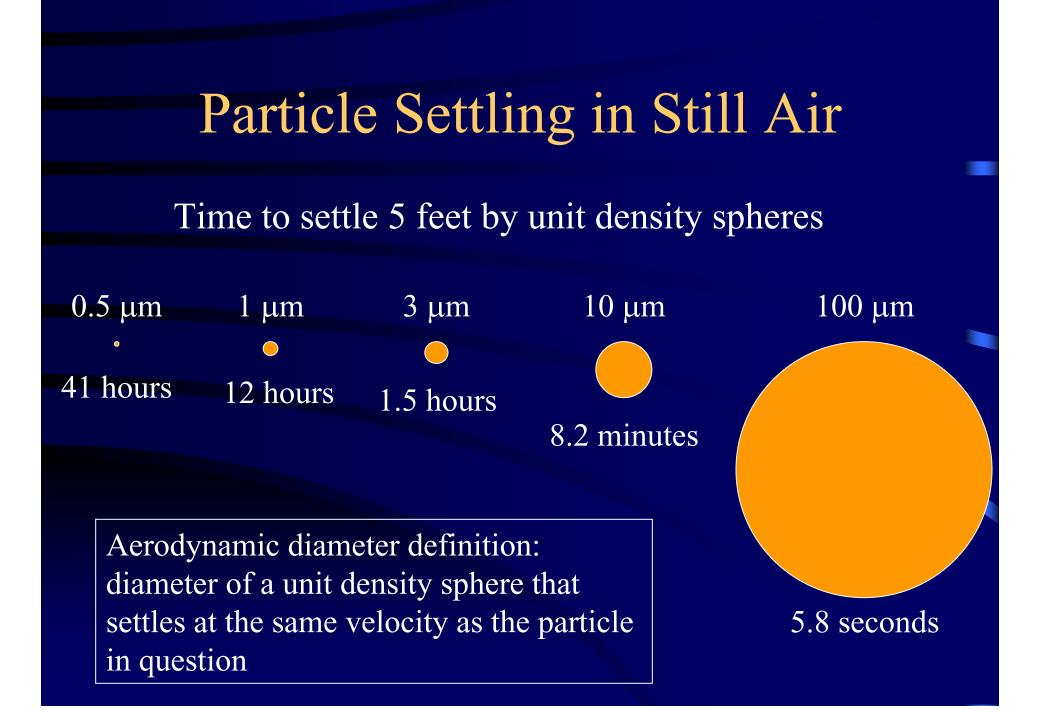


### Particle Settling in a Closed Room

Stagnant air

Turbulent air

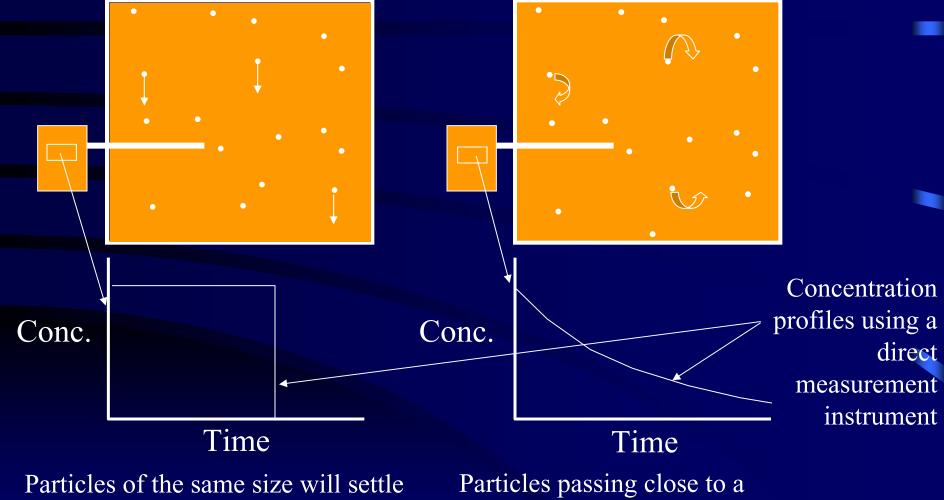

at the same speed in still or stagnant air Particles passing close to a horizontal surface can settle, but the rest will continue to be stirred.

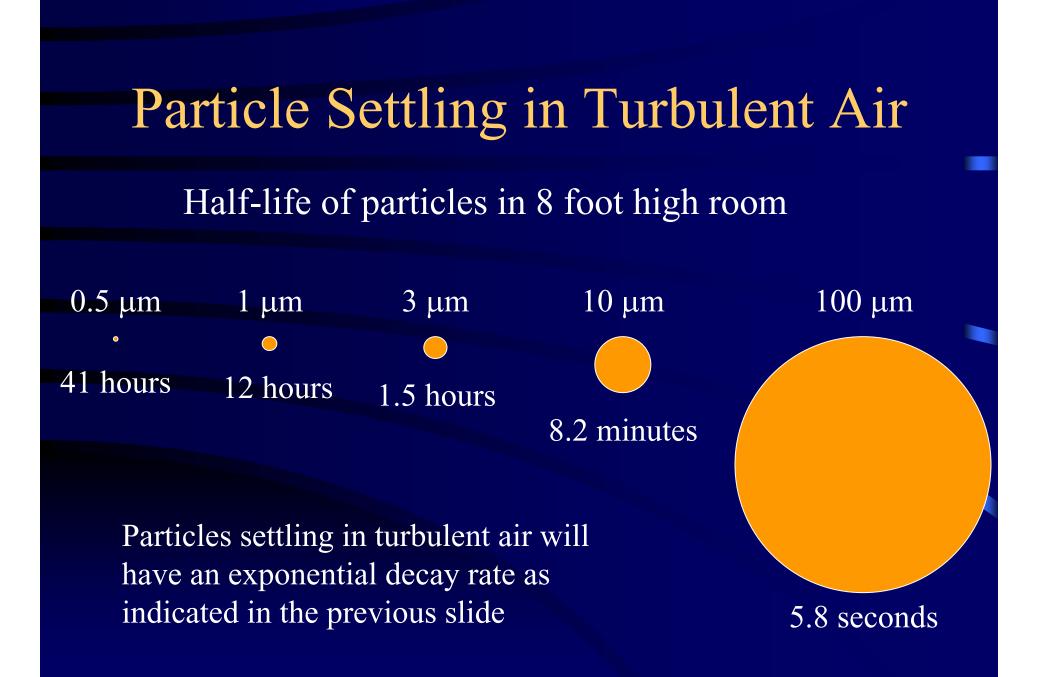

## Particle Transport in Buildings

Ventilation system


- Most large particle losses by settling
- Most small particle losses by exchange with outdoor air
- Complex flow systems
- Turbulence production Doors, people, fans. ventilation

# III. Aerosol Particle Behavior

- Settling
- Impaction
- Charge effects
- Release from surfaces
- Agglomeration/ Deagglomeration


#### **Particle Impaction**

- Impaction depends on particle size, air velocity, jet diameter
- Large particles deposit more easily
- Even larger particles can bounce from surface
- Impaction surface can be modified to improve collection, e.g., add oil

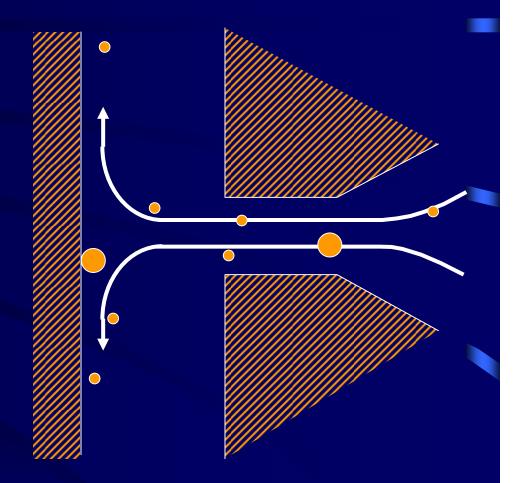


#### **Cascade Impactors**

- Used for size distribution measurement
- Commercial impactors
  - Andersen
  - MOUDI

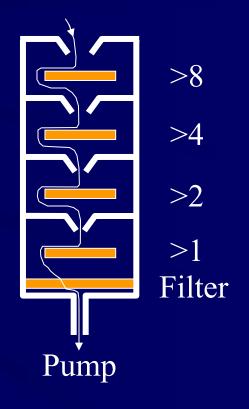

#### Virtual Impactors

- Used to reduce particle bounce
- Used to concentrate larger particles
  - Commercial virtual impactor up to 100:1
  - Contains smaller particles in minor flow

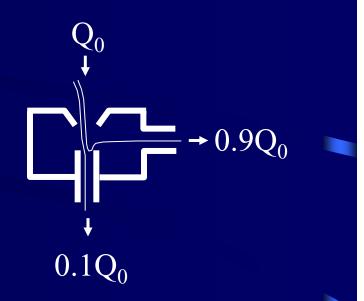


# III. Aerosol Particle Behavior

- Settling
- Impaction
- Charge effects
- Release from surfaces
- Agglomeration/ Deagglomeration

#### **Electrostatic Effects**

- Particle-particle interaction small
- Particle-surface interaction large
- Particle charge depends mostly on generation process, surface energy, humidity, time in the air
- Airborne particle charge gradually decreases due to ions in air (particles are nearly neutral after about 30 min)

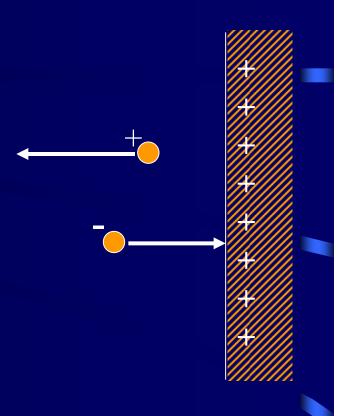


# Particle Charge Imparted During Generation—Liquid Droplets

- In conductive solution, ions equally distributed
- In nonconductive solution, fewer ions
- Droplet charge generally low
- When liquid evaporates, the final particle may have relatively high charge


### Particle Charge Imparted During Generation—Solid Particles

- Difference in surface energy levels
- Separation energy
- Humidity creates bridge between particle and surface

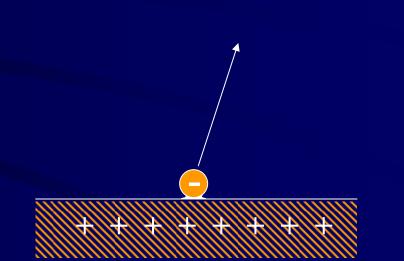

## Space Charge Expansion of Aerosol

- High aerosol concentration
- Particles are highly charged
- All particles have same polarity
- Aerosol will expand because of particle-particle repulsion

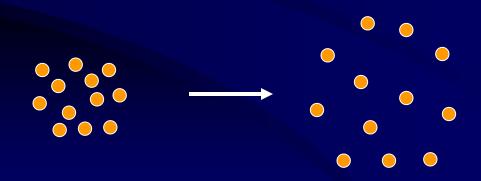

# III. Aerosol Particle Behavior

- Settling
- Impaction
- Charge effects
- Release from surfaces
- Agglomeration/ Deagglomeration

#### Generation from Carpet

- Particles deposited in carpet; acts as a sink
- Footstep crushes fibers against each other
- Footstep compresses carpet, creating high velocity air flow

#### Particle Transport from Sources

Small particles through ventilation system

Transport by local turbulence


Resuspension by activity

Direct settling (larger particles and clumps

#### Asbestos Fiber Generation

Effect of humidity on particle charge and particle generation efficiency



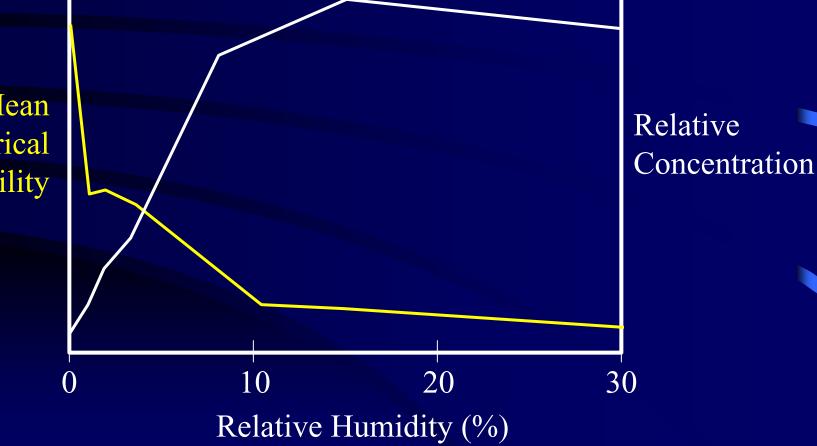


### Particle Removal from Surfaces by Air Flow

- Boundary layer near surface—produced by motionless surface
- Factors affecting release: Air velocity, particle attraction to surface versus particle cross section
- Water (humidity) can increase adhesion

< 0.1 µm virtually impossible > 20 µm relatively easy

### Vacuum Removal

- Suction forces air near surface to remove particles
- Variable removal efficiency

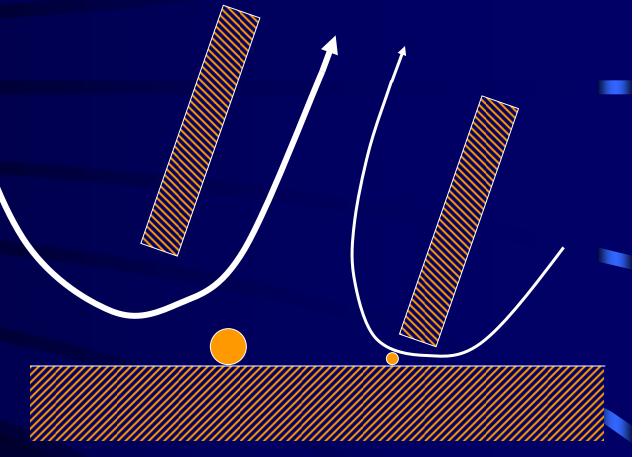


# III. Aerosol Particle Behavior


- Settling
- Impaction
- Charge effects
- Release from surfaces
- Agglomeration/ Deagglomeration

### Agglomeration/ Deagglomeration

- Particles in a powder are in close contact, primarily agglomerates
- Shaken powder releases clumps (agglomerates) and single particles
- Shear forces, caused by difference in air velocity across the particle, can break apart clumps
- Shear forces increase with increasing energy (air velocity)



#### Particle Size Evolution

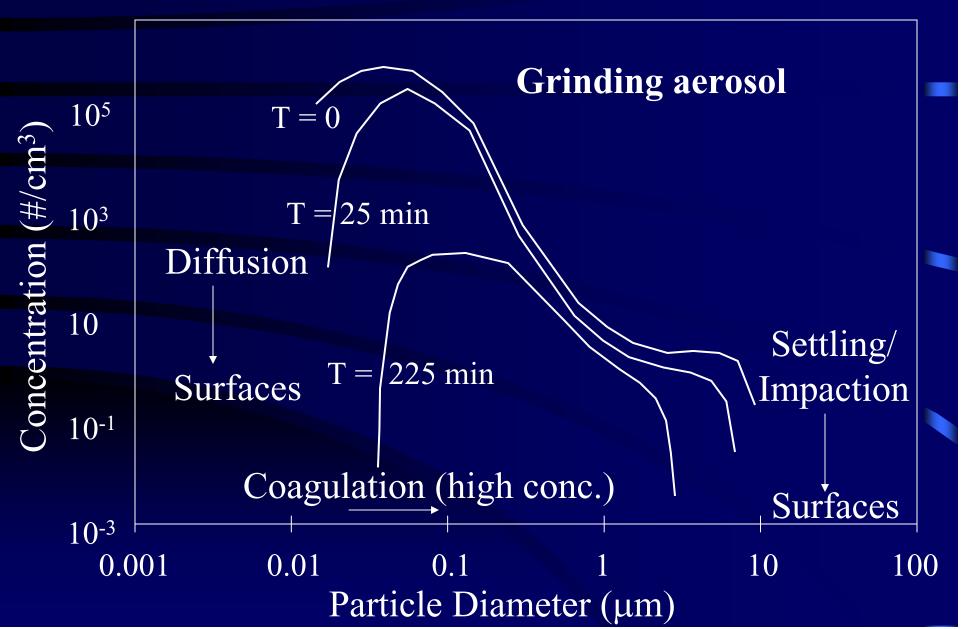

#### IV. Aerosol Generation

Energy Input Air flow Mechanical energy < 0.1 µm virtually impossible > 20 µm relatively easy

> Airflow to entrain particles

Adhesion depends mostly on microroughness of surface, also on relative surface energies


Overcome adhesion between particle and surface Release happens in microseconds

#### V. Particle Collection and Measurement

- Filter sampling
  - Filter efficiency, pore size, filter type
  - Sufficient volume for analysis
  - Dries particles because of continuous air flow
  - Removal from filter can be an issue
- Impactor sampling
  - Cascade impactor: 3 to 8 stages, size resolution
  - Sufficient volume for analysis
  - Dries particles, though less than filter
  - Inert (oiled?) surface or direct to growth medium

### Filtration

- Air filtration different from liquid filtration
- Pore size in air filters generally meaningless as indicator of efficiency
- Small particles collected by diffusion, large ones by impaction/interception
- Maximum penetration at about 0.3 μm
- Efficiency increases with increasing air velocity

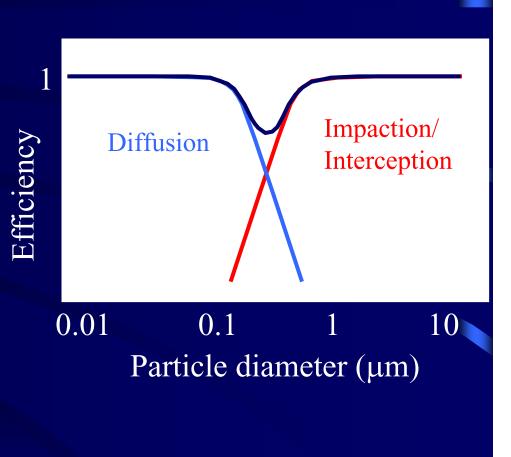

# Direct Reading Aerosol Measurement

Optical particle counter


- Relatively inexpensive (~2K \$10K)
- Portable, battery operated
- Rapid detection
- Nonspecific for bacteria
- Toxic concentrations near or below ambient particle concentrations
- Can be used for tracer studies

## Direct Reading Aerosol Measurement

Aerodynamic Particle Sizer

- Relatively expensive (~\$40K)
- Movable, line operated
- Higher size resolution, possibly improved size distribution signature
- Fluorescent detection version
- Can be used for tracer studies

#### **Overall Scenario**

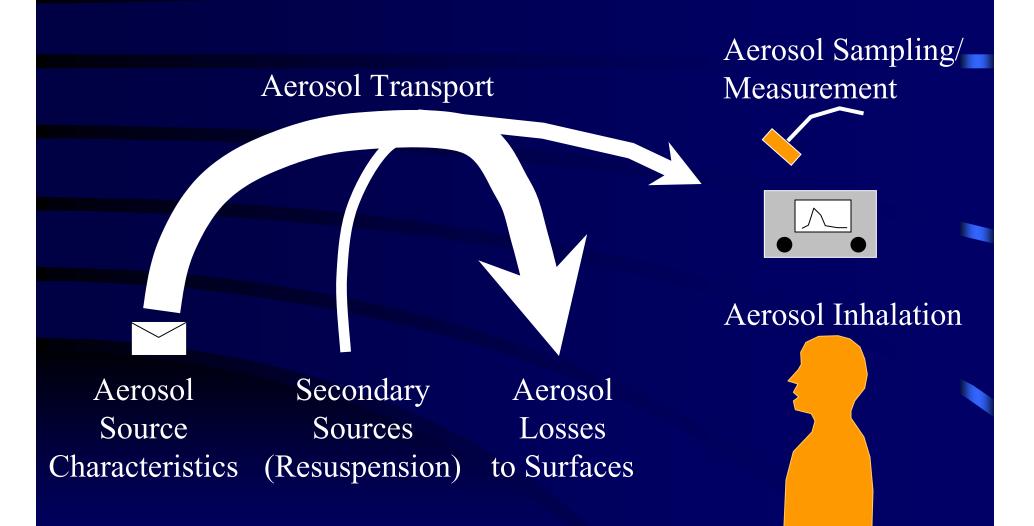

### Resources for Aerosol Information

- Hinds, 1999, Aerosol Technology, Wiley
- Baron and Willeke, 2001, Aerosol Measurement, Wiley
- Hurst, 1997, Manual of Environmental Microbiology, ASM Press
- Spreadsheet: Aerosol Calculator available from www.tsi.com or www.bgiusa.com